# 70 WATTS DC2-70 SERIES

#### FEATURES:

- RoHS Compliant
- 18-36 VDC Input
- Advanced SMT Design
- Compact 2.5" x 4.5" x 1.2" Size
- 2 Year Warranty
- One to Four Outputs 4242 VDC Reinforced Insulation



OPEN FRAME

• Fits 1U Applications

DC-DC

- EN 60950-1 ITE Certification • EN 60601-1 Medical Certiffication
- Size & Pin compatible with
- **Rel-70 Series** • Optional Chassis and Cover



# CHASSIS/COVER

SAFETY S	PECIFICATI	ONS			
-	Underwriters		UL 60950-1 2 <sup>nd</sup> Edition, 2007		
c <b>FL</b> us	Laboratories		UL 60601-1 1st Edition, 2006		
	File E137708/E140259		AAMI/ANSI ES 60601-1, 2005		
			CB Reports/Certificates (including all National and Group Deviations) IEC 60950-1/A1:2009, Second Edition		
TECEE					
SCILLINE				8 +A1:1991 +A2:1995	
			IEC 60601-1:200		
	UL Recognition Mark for Canada		CAN/CSA-C22.2 No. 60950-1-07,		
c 🔁 us			2 <sup>nd</sup> Edition		
• •	File E137708/	E140259	CAN/CSA-C22.2 No. 601-1-M90, 2005 CAN/CSA-C22.2 No. 60601-1:2008		
8					
TUV	TUV		EN 60950-1/A1:2010 EN 60601-1/A2:1995		
SUD	100		EN 60601-1/A2:1995 EN 60601-1:2006		
				-	
(E			Low Voltage Directive		
			(2006/95/EC of E	December 2006)	
MODEL LI	STING				
MODEL	OUTPUT 1	OUTPUT 2	OUTPUT 3	OUTPUT 4	
MODEL DC2-70-4001	<b>OUTPUT 1</b> +3.3V/6A	+5V/5A	+12V/2A(2)	-12V/2A(2)	
<b>MODEL</b> DC2-70-4001 DC2-70-4002	<b>OUTPUT 1</b> +3.3V/6A +5V/6A	+5V/5A +3.3V/5A	+12V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub>	-12V/2A <sub>(2)</sub> -12V/2A <sub>(2)</sub>	
MODEL DC2-70-4001 DC2-70-4002 DC2-70-4003	OUTPUT 1 +3.3V/6A +5V/6A +5V/6A	+5V/5A +3.3V/5A +3.3V/5A	+12V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub>	-12V/2A <sub>(2)</sub> -12V/2A <sub>(2)</sub> -15V/2A <sub>(2)</sub>	
MODEL DC2-70-4001 DC2-70-4002 DC2-70-4003 DC2-70-4004	OUTPUT 1 +3.3V/6A +5V/6A +5V/6A +5V/6A	+5V/5A +3.3V/5A	+12V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub>	-12V/2A <sub>(2)</sub> -12V/2A <sub>(2)</sub> -15V/2A <sub>(2)</sub> -12V/2A <sub>(2)</sub>	
MODEL DC2-70-4001 DC2-70-4002 DC2-70-4003 DC2-70-4004 DC2-70-4005	OUTPUT 1 +3.3V/6A +5V/6A +5V/6A +5V/6A +5V/6A	+5V/5A +3.3V/5A +3.3V/5A -5V/5A -5V/5A	+12V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub>	-12V/2A <sub>(2)</sub> -12V/2A <sub>(2)</sub> -15V/2A <sub>(2)</sub> -12V/2A <sub>(2)</sub> -15V/2A <sub>(2)</sub>	
MODEL DC2-70-4001 DC2-70-4002 DC2-70-4003 DC2-70-4004 DC2-70-4005 DC2-70-4006	+3.3V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A	+5V/5A +3.3V/5A +3.3V/5A -5V/5A -5V/5A +24V/2A	+12V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub>	-12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2)	
MODEL DC2-70-4001 DC2-70-4002 DC2-70-4003 DC2-70-4004 DC2-70-4005 DC2-70-4006 DC2-70-4007	OUTPUT 1 +3.3V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A	+5V/5A +3.3V/5A +3.3V/5A -5V/5A -5V/5A +24V/2A +24V/2A	+12V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub>	-12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -15V/2A(2)	
MODEL   DC2-70-4001   DC2-70-4002   DC2-70-4003   DC2-70-4004   DC2-70-4005   DC2-70-4006   DC2-70-4007   DC2-70-3001	OUTPUT 1 +3.3V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A	+5V/5A +3.3V/5A +3.3V/5A -5V/5A -5V/5A +24V/2A +24V/2A +12V/2A	+12V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub>	-12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A	
MODEL   DC2-70-4001   DC2-70-4002   DC2-70-4003   DC2-70-4004   DC2-70-4005   DC2-70-4006   DC2-70-4007   DC2-70-3001   DC2-70-3002	OUTPUT 1 +3.3V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A	+5V/5A +3.3V/5A +3.3V/5A -5V/5A -5V/5A +24V/2A +24V/2A +12V/2A +15V/2A	+12V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub>	-12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -15V/2A(2)	
MODEL   DC2-70-4001   DC2-70-4002   DC2-70-4003   DC2-70-4004   DC2-70-4005   DC2-70-4005   DC2-70-4007   DC2-70-3001   DC2-70-3002   DC2-70-2001	OUTPUT 1 +3.3V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +3.3V/6A	+5V/5A +3.3V/5A +3.3V/5A -5V/5A -5V/5A +24V/2A +24V/2A +12V/2A +15V/2A +5V/5A	+12V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub>	-12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A	
MODEL   DC2-70-4001   DC2-70-4002   DC2-70-4003   DC2-70-4003   DC2-70-4005   DC2-70-4005   DC2-70-4007   DC2-70-3001   DC2-70-3002   DC2-70-2001   DC2-70-2002	OUTPUT 1 +3.3V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +3.3V/6A +5V/6A	+5V/5A +3.3V/5A +3.3V/5A -5V/5A -5V/5A +24V/2A +24V/2A +12V/2A +15V/2A +5V/5A +12V/4A	+12V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub>	-12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A	
MODEL   DC2-70-4001   DC2-70-4002   DC2-70-4003   DC2-70-4004   DC2-70-4005   DC2-70-4006   DC2-70-3001   DC2-70-3002   DC2-70-2001   DC2-70-2002   DC2-70-2003	OUTPUT 1 +3.3V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A	+5V/5A +3.3V/5A +3.3V/5A -5V/5A -5V/5A +24V/2A +12V/2A +15V/2A +5V/5A +12V/4A +24V/2A	+12V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub>	-12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A	
MODEL   DC2-70-4001   DC2-70-4002   DC2-70-4003   DC2-70-4004   DC2-70-4005   DC2-70-4006   DC2-70-4007   DC2-70-3001   DC2-70-2001   DC2-70-2002   DC2-70-2003   DC2-70-2004	OUTPUT 1 +3.3V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +3.3V/6A +5V/6A +5V/6A +5V/6A +5V/6A +12V/3A	+5V/5A +3.3V/5A +3.3V/5A -5V/5A -5V/5A +24V/2A +24V/2A +15V/2A +5V/5A +12V/4A +24V/2A -12V/3A	+12V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub>	-12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A	
MODEL   DC2-70-4001   DC2-70-4002   DC2-70-4003   DC2-70-4004   DC2-70-4005   DC2-70-4006   DC2-70-4007   DC2-70-3001   DC2-70-2001   DC2-70-2002   DC2-70-2003   DC2-70-2004   DC2-70-2005	OUTPUT 1 +3.3V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +12V/3A +15V/3A	+5V/5A +3.3V/5A +3.3V/5A -5V/5A -5V/5A +24V/2A +12V/2A +15V/2A +5V/5A +12V/4A +24V/2A	+12V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub>	-12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A	
MODEL   DC2-70-4001   DC2-70-4002   DC2-70-4003   DC2-70-4004   DC2-70-4005   DC2-70-4006   DC2-70-4007   DC2-70-3001   DC2-70-2002   DC2-70-2003   DC2-70-2004   DC2-70-2005   DC2-70-1001	OUTPUT 1 +3.3V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +12V/3A +15V/3A 2.5V/14A(1)	+5V/5A +3.3V/5A +3.3V/5A -5V/5A -5V/5A +24V/2A +24V/2A +15V/2A +5V/5A +12V/4A +24V/2A -12V/3A	+12V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub>	-12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A	
MODEL   DC2-70-4001   DC2-70-4002   DC2-70-4003   DC2-70-4004   DC2-70-4005   DC2-70-4006   DC2-70-4007   DC2-70-3001   DC2-70-2001   DC2-70-2003   DC2-70-2004   DC2-70-2005   DC2-70-1001   DC2-70-1002	OUTPUT 1 +3.3V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A	+5V/5A +3.3V/5A +3.3V/5A -5V/5A -5V/5A +24V/2A +24V/2A +15V/2A +5V/5A +12V/4A +24V/2A -12V/3A	+12V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub>	-12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A	
MODEL   DC2-70-4001   DC2-70-4002   DC2-70-4003   DC2-70-4004   DC2-70-4005   DC2-70-4006   DC2-70-4007   DC2-70-3001   DC2-70-2002   DC2-70-2003   DC2-70-2004   DC2-70-2005   DC2-70-1001   DC2-70-1002   DC2-70-1003	OUTPUT 1 +3.3V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +12V/3A +15V/3A 2.5V/14A <sub>(1)</sub> 5V/14A <sub>(1)</sub>	+5V/5A +3.3V/5A +3.3V/5A -5V/5A -5V/5A +24V/2A +24V/2A +15V/2A +5V/5A +12V/4A +24V/2A -12V/3A	+12V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub>	-12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A	
MODEL   DC2-70-4001   DC2-70-4002   DC2-70-4003   DC2-70-4004   DC2-70-4005   DC2-70-4006   DC2-70-4007   DC2-70-3001   DC2-70-2001   DC2-70-2003   DC2-70-2004   DC2-70-2005   DC2-70-1001   DC2-70-1002	OUTPUT 1 +3.3V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A +5V/6A	+5V/5A +3.3V/5A +3.3V/5A -5V/5A -5V/5A +24V/2A +24V/2A +15V/2A +5V/5A +12V/4A +24V/2A -12V/3A	+12V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub> +15V/2A <sub>(2)</sub> +12V/2A <sub>(2)</sub>	-12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A(2) -15V/2A(2) -12V/2A	

# DC2-70-1008 NOTES

DC2-70-1006

DC2-70-1007

Consult factory for alternate output configurations.

24V/2.9A

28V/2.5A

48V/1.5A

Consult factory for positive, negative or floating outputs.


Refer to Applications Information for complete output power ratings.

All specifications are maximum at 25° C, 70W unless otherwise stated, may vary by model and are subject to change without notice.


Specify optional chassis and cover, power good or reverse input protection when ordering.


<b>OUTPUT SPECIFICAT</b>	IONS		
Total Output Power at 50°C	50W		on Cooled
	70W	300 LFM	Forced Air
Output Voltage Centering	Output 1:	± 0.5%	(All outputs
	Output 2:	± 5.0%	at 50% load)
	Output 3:	$\pm 5.0\%$	
	Output 4:	± 5.0%	
Output Voltage Adjust Range	Output 1:	95 - 105%	
Load Regulation	Output 1:	0.5%	(10-100%
	Output 2:	5.0%	load change)
	(4001-5 Models	) 8.0%	
	(2001 Model)	8.0%	
	Output 3:	5.0%	
	Output 4:	5.0%	
Source Regulation	Outputs 1 – 4:	0.5%	
Cross Regulation	Outputs 2 – 4:	5.0%	
Output Noise	Outputs 1 – 4:	1.0%	
Turn on Overshoot	None		
Transient Response	Outputs 1 – 4		
Voltage Deviation	5.0%		
Recovery Time	500µS		
Load Change	50% to 100%		
Output Overvoltage Protection	Output 1:	110% to 1	
Output Overpower Protection		l Pout, cycle	e on/off, auto recovery
Start Up Time	4 Seconds		
INPUT SPECIFICATIO			
Input Voltage Range	18-36 VDC		
Input Under-Voltage Lockout			
Turn-On Voltage	14.5-17.5 VDC		
Turn-Off Voltage	14.0-17.0 VDC		
Input Overvoltage Shutdown	37.0-43.0 VDC		
Maximum Input Current	5.5 A		
Reflected Ripple Current	5 %		
Efficiency			DC, varies by model
ENVIRONMENTAL SP		NS	
Ambient Operating	0° C to + 70° C		
Temperature Range	Derating: See P		g Chart
Ambient Storage Temp. Range	- 40° C to + 85°	С	
Temperature Coefficient	Outputs 1 – 4:	0.02	%/°C
<b>GENERAL SPECIFICA</b>	TIONS		
Means of Protection			
Primary to Secondary	2MOOP (Means	s of Operato	r Protection)
Primary to Ground	Primary to Ground 1MOOP (Means of Operator Protection)		r Protection)
Secondary to Ground	Operational Insulation (Consult factory for 1MOOP or 1MOPP)		
Dielectric Strength (14)			
Reinforced Insulation	4242 VDC, Prim	nary to Seco	ondary, 1 Sec.
Basic Insulation	2121 VDC, Primary to Ground, 1 Sec.		
Operational Insulation	707 VDC, Seco		
Power Good Signal			e above Vin min.
Remote Sense (singles only)			tput cable losses
Mean-Time Between Failures	100,000 Hours	min., MIL-HI	DBK-217F, 25° C, GB
Weight	0.60 Lbs. Op	en Frame	


1.00 Lbs. MAXIMUM OUTPUT POWER VS. AMBIENT TEMPERATURE

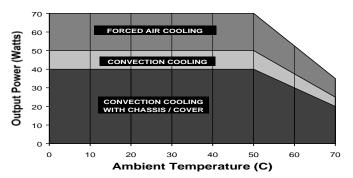

### DC2-70 SERIES MECHANICAL SPECIFICATIONS

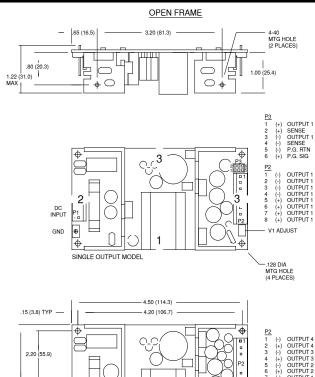


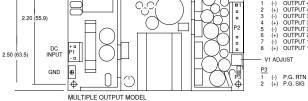







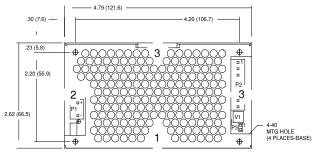

ALL DIMENSIONS IN INCHES (MM

## **APPLICATIONS INFORMATION**

- 1. Rated 10A maximum with convection cooling.
- 2. Rated 1.5A maximum with convection cooling.
- Total power must not exceed 50 watts with convection cooling on open frame models except where noted.
- Total power must not exceed 70 watts with 300 LFM forced air cooling on open frame models.
- 5. Total power must not exceed 40 watts with convection cooling and chassis/cover option.
- Total power must not exceed 70 watts with 300 LFM forced air cooling and chassis/cover option.
- 7. Each output can deliver its rated current but total output power must not exceed maximum power as determined by the cooling method stated above.
- Sufficient area must be provided around convection cooled power supplies to allow natural movement of air to develop.
- 300 linear feet per minute of airflow must be maintained one inch above any point of the heatsink in the direction shown when forced air cooling is required.
- This product is intended for use as a professionally installed component within information technology and medical equipment.
- A minimum load of 10% is required on output one to ensure proper regulation of remaining outputs.
- Remote sense terminals may be used to compensate for cable losses up to 250mV (single output models only). The use of a twisted pair is recommended as well as a decoupling capacitor (0.1 - 10μF) and a capacitor of 100μF/amp connected across the load side.
- Peak to peak output ripple and noise is measured directly at the output terminals of the power supply, without the use of the probe ground lead or retractable tip, 20 MHz bandwidth.
- 14. This product was type tested and safety certified using the dielectric strength test voltages listed in Table 6 of IEC 60601-1:2005. In consideration of Clause 8.8.3, care must be taken to insure that the voltage applied to a reinforced insulation does not overstress different types and levels of insulation. Primary and secondary to ground capacitors may need to be disconnected prior to performing a dielectric strength test on the power supply or the end product. It is highly recommended that the DC test voltages listed in DVB.1, Annex DVB of UL 60601-1 1st Edition are not exceeded during a production-line dielectric strength test of the assembled end product. Please consult factory for further information.
- 15. This power supply has been safety approved and final tested using a DC dielectric
- strength test. Please consult factory before performing an AC dielectric strength test.
- 16. Maximum screw penetration into bottom chassis mounting holes is .100 inches.
- 17. Maximum screw penetration into side chassis mounting holes is .250 inches.
- To meet emissions specifications, all four mounting hole pads must be electrically connected to a common metal chassis. Chassis/cover option recommended.

#### CONNECTOR SPECIFICATIONS

P1	DC Input	.156 friction lock header mates with Tyco 640250-3 or equivalent crimp terminal housing with Tyco 3-640706-1 or equivalent crimp terminal.
P2	DC Output (Single)	.156 friction lock header mates with Tyco 770849-8 or equivalent crimp terminal housing with Tyco 3-640707-1 or equivalent crimp terminal.
P2	DC Output (Multiple)	.156 friction lock header mates with Tyco 770849-8 or equivalent crimp terminal housing with Tyco 3-640707-1 or equivalent crimp terminal.
G	Ground	.187 quick disconnect terminal.
P3	P.G./Sense (Single)	.100 breakaway header mates with Molex 22-55-2061 or equivalent crimp terminal housing with Molex type 71851 or equivalent crimp terminal.
P3	Power Good (Multiple)	.100 breakaway header mates with Molex 50-57-9002 or equivalent crimp terminal housing with Molex type 71851 or equivalent crimp terminal.

#### RECOMMENDED AIR FLOW DIRECTION

1 – Optimum 2 – Good 3 – Fair