
FEATURES:

- RoHS Compliant
- 2 Year Warranty
- High Efficiency, 85% typical
- High Power Density, 8.5 W / cu in.
 Compact 3.9" x 8.0" x 1.5" size
- EN 60950-1 ITE Certification
- EN 60601-1 Medical Certification
- EMC to EN 61000-6-2 & EN 60601-1-2
- Advanced SMT Design
- Optional Chassis/Cover
- Optional Single Wire Load Sharing
- Optional Remote Inhibit/Enable

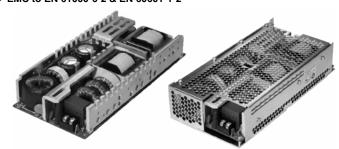

OPEN FRAME

CHASSIS/COVER

SAFETY SPECIFICATIONS					
General		Protection Class: I Overvoltage Category: II Pollution Degree: 2			
c 711 us	Underwriters Laboratories File E137708/E140259	UL 60950-1 2 nd Edition, 2007 UL 60601-1 1 st Edition, 2006 ANSI/AAMI ES 60601-1, 2005			
IECEE CB SCHEME		CB Reports/Certificates (including all National and Group Deviations) IEC 60950-1/a1:2009, Second Edition IEC 60601-1:1988 +A1:1991 +A2:1995 IEC 60601-1:2005 Third Edition			
c 911 us	UL Recognition Mark for Canada File E137708/E140259	CAN/CSA-C22.2 No. 60950-1-07, 2 nd Edition CAN/CSA-C22.2 No. 601-1-M90, 2005 CAN/CSA-C22.2 No. 60601-1:2008			
SUD	TUV	EN 60950-1/A1:2010 EN 60601-1/A2:1995 EN 60601-1:2006			
ϵ		Low Voltage Directive (2006/95/EC of December 2006)			

MODEL LISTING

	OPEN FRAME		CHASSIS/COVER	
MODEL	300 LFM	CONVECTION COOLED	300 LFM	CONVECTION
NXT-400-1001	2.5V/80.0A	2.5V/45.0A	2.5V/72.0A	2.5V/40.5A
NXT-400-1002	3.3V/80.0A	3.3V/45.0A	3.3V/72.0A	3.3V/40.5A
NXT-400-1003	5V/80.0A	5V/45.0A	5V/72.0A	5V/40.5A
NXT-400-1004	12V/33.3A	12V/18.8A	12V/29.9A	12V/16.9A
NXT-400-1005	15V/26.7A	15V/15.0A	15V/24.0A	15V/13.5A
NXT-400-1006	24V/16.7A	24V/9.4A	24V/15.0A	24V/8.5A
NXT-400-1007	28V/14.3A	28V/8.0A	28V/12.8A	28V/7.2A
NXT-400-1008	48V/8.3A	48V/4.7A	48V/7.5A	48V/4.2A

Please refer to Output Power Derating chart.

ORDERING INFORMATION

Please specify the following optional features when ordering: CH - Chassis LSEVB - Load Share Evaluation Board

CO - Cover RE - Remote Inhibit


LS - Single Wire Load Sharing


All specifications are maximum at 25°C, 400W unless otherwise stated, may vary by model and are subject to change without notice.

OUTPUT SPECIFICATION	ONS		
Output Power at 50°C	225W	Convection Cooled, Open Frame	
	400W	300 LFM Forced Air, Open Frame	
Power Derating	2.5 Wout / 1 Vin I		
Voltage Centering	± 0.5%	(50% load)	
Voltage Adjust Range	95-105%		
Load Regulation	0.5%	(0-100% load change)	
Source Regulation	0.5%		
Noise	1.0% or 100mV	Whichever is greater	
Turn on Overshoot	None		
Transient Response		o within 1% of initial set point due to a 50%	
0 " "	step load change	, 500µS maximum, 4% maximum deviation.	
Overvoltage Protection	Latching, between 110% and 150% of rated output voltage.		
Overpower Protection	110-130% rated Pout, cycle on/off, auto recovery		
Hold Up Time	16 mS min., Full Power, 85-264V Input 3 Seconds, 120V Input		
Start Up Time		Input	
INPUT SPECIFICATION			
Source Voltage	85 – 264 Volts AC	<u>;</u>	
Frequency Range	47 – 63 Hz		
Input Protection	Internal 10A Time Delay fuse		
Peak Inrush Current	50A (cold)		
Efficiency	85% Typical, Full Power varies by model		
Power Factor	0.95 (Full Power, 230V), 0.98 (Full Power, 120V)		
ENVIRONMENTAL SPE		15	
Ambient Operating	0° C to + 70° C		
	emperature Range Derating: See Power Rating Chart		
Thermal Shutdown		inhibited during excessive internal	
	temperatures, aut		
Ambient Storage Temp. Range	- 40° C to + 85° (
Operating Relative Humidity Range	20-90% non-cond		
Altitude		perating/ 40,000 ft. ASL Non-operating	
Temperature Coefficient	0.02%/°C		
Vibration	2.5g, 10Hz. – 2Kl	Hz per MIL-STD-810F Method 514.5	
Shock		L-STD-810F Method 516.5	
GENERAL SPECIFICAT	IONS		
Means of Protection			
Primary to Secondary		of Patient Protection)	
Primary to Ground		of Operator Protection)	
Secondary to Ground	Operational insula	ation(Consult factory for 1MOOP or 1MOPP)	
Dielectric Strength ₍₁₂₎ Reinforced Insulation	E4E4 VDC Drimo	inuto Cocondanu 1 Coc	
Basic Insulation		ry to Secondary, 1 Sec. ry to Ground, 1 Sec.	
		dary to Ground, 1 Sec.	
Operational Insulation Leakage Current	707 VDC, Second	dary to Ground, 1 Sec.	
Earth Leakage	<300uA NC, <100	OUTV SEC	
Touch Current	<100uA NC, <100		
Power Fail Signal		out power failure 10 ms minimum prior to	
rowei Fall Signal	output 1 dropping		
Remote Inhibit (optional)		closure inhibits output.	
Load Share (optional)		nt sharing with return via negative sense	
Edda Share (optional)		current share load is 10% of each module's	
		ing. Maximum output voltage deviation	
	between modules	s is 5% for 2.5 through 5 V models and 400	
	mV for remaining		
Standby Power (optional)	J	10%, 10mA available with Remote Inhibit	
(4)	Option.	Total taranagie marttemete minet	
Remote Sense		ation of output cable losses	
Mean-Time Between Failures		in., MIL-HDBK-217F, 25° C, GB	
Weight		Frame/ 3.60 Lbs. Chassis and Cover	
ELECTROMAGNETIC C			
Electrostatic Discharge	EN 61000-4-2	±6kV Contact/ ±8kV Air Discharge	
Radiated Electromagnetic Field	EN 61000-4-3	80-2500MHz, 10V/m, 80% AM	
EFT/Bursts	EN 61000-4-4	±2 kV	
Surges	EN 61000-4-5	±2 kV Line to Earth/ ±1 kV Line to Line	
Conducted Immunity	EN 61000-4-5	.15 to 80MHz, 10V, 80% AM	
Magnetic Field Immunity	EN 61000-4-8	30A/m, 50/60 Hz.	
Voltage Dips	EN 61000-4-11	95% Dip, 10ms	
Voltage Dips	EIN 01000-4-11	30% Dip, 500ms	
		60% Reduction, 1s (Criteria B)	
Voltage Interruptions	EN 61000-4-11	95% Reduction, 5s	
Radiated Emissions	EN 55011/22,	Class B	
	FCC Part 15		
Conducted Emissions	EN 55011/22,	Class B	
	FCC Part 15		
Harmonic Current Emissions	EN 61000-3-2	Compliance	
-		•	

Voltage Fluctuations and Flicker EN 61000-3-3 Compliance

NXT-400 SERIES MECHANICAL SPECIFICATIONS

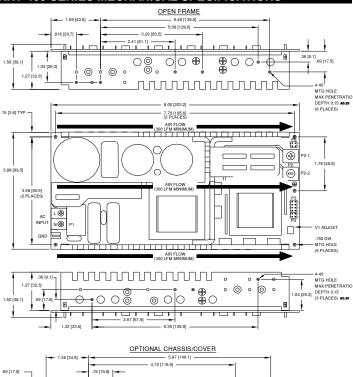

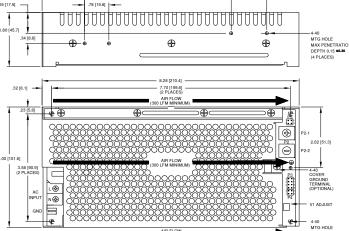

CONNECTOR SPECIFICATIONS

P1

AC Input Terminal block with 6-32 screws on **(4)** 0.325 centers mates with #6, spade terminals. (8 in-lb max) P2 DC Output 10-32 screw down terminal mates with OUTPUT 1 (+) OUTPUT 1 (-) #10 ring tongue terminal. (10 in-lb Max) P3 Load Share, .100 friction lock header mates with SHARE BUS 4 • • 8 SENSE (-) Molex 22-55-2081 or equivalent crimp Sense 7 SENSE (-) **ENARIE** 3 . . terminal housing with Molex 71851 or OUTPUT 1 (+) 2 OUTPUT 1 (-) equivalent crimp terminal SENSE (+) SENSE (-) Power .100 friction lock header mates with P4 Molex 22-55-2041 or equivalent crimp Fail P.F. RTN 4 P.F. RTN terminal housing with Molex 71851 or P.F. SIG (+) 3 P.F. SIG (+) crimp equivalent terminal .100 friction lock header mates with Inhibit 4 STBY PWR (-) . . INHIBIT RTN Standby Molex 22-55-2041 or equivalent crimp INHIBIT 3 STBY PWR (+)

Power

Ground

terminal housing with Molex 71851 or


equivalent crimp terminal.

.187 quick disconnect terminal.

APPLICATIONS INFORMATION

- 1. Sufficient area must be provided around power supply to allow natural movement of air to develop in convection cooled applications.
- 300 linear feet per minute (minimum) of airflow must be maintained along all outside surfaces of exposed heatsinks or chassis. See recommended air flow diagram as a guideline.
- 3. Generally, adequate cooling is provided when semiconductor case temperatures do not exceed 75° C rise and transformer temperature does not exceed 80° C rise at any specified ambient temperature.
- 4. This product is intended for use as a professionally installed component within information technology, industrial and medical equipment and is not intended for stand alone operation. Common RF shielding precautions may need to be taken to assure emissions compliance. Refer to operating instructions for additional information.
- This product includes only one fuse in the input circuit. In consideration of Clause 8.11.5 of IEC 60601-1:2005, a second fuse may be required in the end product.
- Low forward voltage drop oring diodes must be used in all load sharing applications in 2.5 through 15 Volt models. Oring diodes must be used on 24 through 48 Volt models used in fault tolerant applications but are optional in power boosting applications. Oring diode power dissipation must be subtracted from the maximum output power rating of each model
- 7. Current carrying conductors in load sharing applications must be short and symmetrical. Remote sense conductors should be a twisted pair. The use of an appropriately rated low impedance capacitor across the load will increase noise immunity.
- 8. Refer to Load Share Evaluation Board data sheet (page 58) for additional load share applications information.
- 9. Remote sense terminals may be used to compensate for cable losses up to 400 mV depending on model. The use of a twisted pair, decoupling capacitors and an appropriately rated low impedance capacitor connected across the load will increase noise immunity.
- 10. A load equal to 5% rated output power must be maintained when using standby power option. An external electrolytic capacitor across standby power output may be used to improve transient response
- 11. Peak to peak output ripple and noise is measured directly at the output terminals of the power supply, without the use of the probe ground lead or retractable tip, 20 MHz bandwidth.
- This product was type tested and safety certified using the dielectric strength test voltages listed in Table 6 of IEC 60601-1:2005. In consideration of Clause 8.8.3, care must be taken to insure that the voltage applied to a reinforced insulation does not overstress different types and levels of insulation. Primary and secondary to ground capacitors may need to be disconnected prior to performing a dielectric strength test on the power supply or the end product. It is highly recommended that the DC test voltages listed in DVB.1, Annex DVB of UL 60601-1 1st Edition are not exceeded during a production-line dielectric strength test of the assembled end product. Please consult factory for further information.
- This power supply has been safety approved and final tested using a DC dielectric strength test. Please consult factory before performing an AC dielectric strength test.
- Maximum screw penetration into bottom chassis mounting holes is .100 inches.
- 15. Maximum screw penetration into side chassis mounting holes is .150 inches.
- To comply with emissions specifications, all five mounting hole pads must be electrically connected to a common metal chassis. Chassis/cover option recommended and should be grounded.

MAX Pout vs. AMBIENT TEMPERATURE/INPUT VOLTAGE

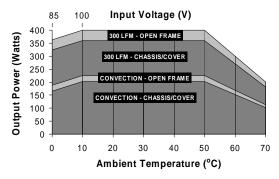

Derating requirements - Chart above applies to models 1003 thru 1008 only. 400 Watts 300 LFM forced air, open frame. 225 Watts convection cooled open frame. Derate 10% with chassis and cover. Derate 2.5 Wout / 1 Vin below 100 Vin and between 100 Vin and 85 Vin. Use larger of the two deratings when using chassis/cover below 100 V_{IN}. Derate output power linearly to 50% between 50° and 70° C

TYPICAL LOAD SHARE/REMOTE SENSE APPLICATION

