

# 60 WATTS

## GRN-60 SINGLE OUTPUT AC-DC

### FEATURES:

- RoHS Compliant
- Advanced SMT Design
- <0.3W No Load Input Power
- 90% Peak Efficiency
- 87% Average Efficiency
- Excellent Light Load Efficiency
- 2 Year Warranty
- Compact 2.0" x 3.0" x 1.0" Size
- EN 60950-1 ITE Certification
- EN 60601-1 Medical Certification
- EN 61000-6-2 & EN 60601-1-2 EMC
- Optional Chassis/Cover








OPEN FRAME



CHASSIS/COVER

### SAFETY SPECIFICATIONS

General	Protection Class: I Overvoltage Category: II Pollution Degree: 2
 Underwriters Laboratories File E137708/E140259	<i>PENDING</i> UL 60950-1 Second Edition, 2007 <i>PENDING</i> UL 60601-1 First Edition, 2006 <i>PENDING</i> AAMI/ANSI ES 60601-1, 2005
	CB Reports/Certificates (including all National and Group Deviations) IEC 60950-1/A1:2009, Second Edition <i>PENDING</i> IEC 60601-1:1988 +A1:1991 +A2:1995 <i>PENDING</i> IEC 60601-1:2005 Third Edition
 UL Recognition Mark for Canada File E137708/E140259	<i>PENDING</i> CAN/CSA-C22.2 No. 60950-1-07, Second Edition <i>PENDING</i> CAN/CSA-C22.2 No. 601-1-M90, 2005 <i>PENDING</i> CAN/CSA-C22.2 No. 60601-1:2008
 TUV	<i>PENDING</i> EN 60950-1/A1:2010 <i>PENDING</i> EN 60601-1/A2:1995 <i>PENDING</i> EN 60601-1:2006
	Low Voltage Directive (2006/95/EC of December 2006)

### MODEL LISTING

MODEL	OUTPUT	P <sub>out</sub>
GRN-60-1001	3.3V/9.0A	30W
GRN-60-1002	5.0V/9.0A	45W
GRN-60-1003	12V/5.0A	60W
GRN-60-1004	15V/4.0A	60W
GRN-60-1005	24V/2.5A	60W
GRN-60-1006	28V/2.2A	60W
GRN-60-1007	48V/1.3A	60W
GRN-60-1008	19V/3.1A	60W

### ORDERING INFORMATION

Please specify the following optional features when ordering:

CH - Chassis  
CO - Cover  
OVP - Overvoltage protection

All specifications are maximum at 25°C, 45W unless otherwise stated, may vary by model and are subject to change without notice.

# GREEN MODE

## OUTPUT SPECIFICATIONS

Output Power at 50°C	60W	85-264 V <sub>IN</sub> (see derating chart)
Voltage Centering	±0.5%	(Output at 50% load)
Voltage Adjust Range	95-105%	
Load Regulation	±0.5%	(0-100% load change)
Source Regulation	0.5%	
Ripple & Noise	1.0%	<100mV (1001,1002)
Turn-On Overshoot	None	
Transient Response	Output recovers to within 1% of initial set point due to a 50% step load change, 500µs maximum, 5% maximum deviation. (maximum deviation on 1001-8%, 1002-6%)	
Overvoltage Protection	Latching, between 110% and 150% of rated output voltage (optional)	
Overpower Protection	110% rated P <sub>OUT</sub> min, cycle on/off, auto recovery	
Hold-Up Time	16 ms typical, full power, 115V input	
Start-Up Time	1 sec., 115/230V input	
Output Rise Time	27 ms typical	
Minimum Load	No minimum load required	

## INPUT SPECIFICATIONS

Source Voltage	85 – 264 VAC (see derating chart)	
Frequency Range	47 – 63 Hz	
Input Protection <sup>(5)</sup>	Internal 2A time delay fuse, 1500A breaking capacity	
Peak Inrush Current	50A max. at 230 V	
Peak Efficiency	90%, 115/230 V <sub>IN</sub> , 100% power	
Average Efficiency	87% (1003-1007), 85% (1002), 80% (1001)	
Light Load Efficiency	85%, 115/230 V <sub>IN</sub> , 33% power	
No Load Input Power	<0.3W, 115/230 V <sub>IN</sub> , no load	

## ENVIRONMENTAL SPECIFICATIONS

Cooling	Free air convection	
Ambient Operating Temperature Range	0° C to + 70° C	
Derating	see power rating chart	
Ambient Storage Temp. Range	- 40° C to + 85° C	
Operating Relative Humidity Range	20-90% non-condensing	
Altitude	10,000 ft. ASL	Operating
	40,000 ft. ASL	Non-operating
Temperature Coefficient	0.02%/°C	
Vibration	2.5G swept sine, 7-2000Hz, 1 octave/min, 3 axis, 1 hour each.	
Shock	20G, 11ms, 3 axis, 3 each direction.	

## GENERAL SPECIFICATIONS


Means of Protection	Primary to Secondary 2MOPP (Means of Patient Protection) Primary to Ground 1MOPP (Means of Patient Protection) Secondary to Ground Operational Insulation(Consult factory for 1MOOP or 1MOPP)	
Dielectric Strength <sup>(7,8)</sup>	Reinforced Insulation 5656 VDC, primary to secondary, 1 sec. Basic Insulation 2545 VDC, primary to ground, 1 sec. Operational Insulation 707 VDC, secondary to ground, 1 sec.	
Leakage Current	Earth Leakage <300uA NC, <1000uA SFC Touch Current <100uA NC, <500uA SFC	
Switching Frequency	65 KHz	
Remote Sense	400 mV compensation of output cable losses	
Mean-Time Between Failures	>250,000 hours, MIL-HDBK-217F, 25° C, GB	
Weight	0.24 lb. Open frame/ 0.34 lbs. Chassis and cover	

## ELECTROMAGNETIC COMPATIBILITY SPECIFICATIONS


Electrostatic Discharge	EN 61000-4-2	± 6kV contact/ ± 8kV air discharge
Radiated Electromagnetic Field	EN 61000-4-3	80-1000MHz, 1.0-2.7 GHz 10V/m, 80% AM
EFT/Bursts	EN 61000-4-4	± 2 kV
Surges	EN 61000-4-5	± 2 kV line to earth, ± 1 kV line to line
Conducted Immunity	EN 61000-4-6	.15 to 80MHz, 10V, 80% AM
Magnetic Field Immunity	EN 61000-4-8	30A/m, 50/60 Hz.
Voltage Dips	EN 61000-4-11	95% dip, 10ms 30% dip, 100ms 60% reduction, 500 ms (Criteria B)
Voltage Interruptions	EN 61000-4-11	95% reduction, 5 sec.
Radiated Emissions	EN 55011/22, FCC Part 15	Class B
Conducted Emissions	EN 55011/22, FCC Part 15	Class B
Harmonic Current Emissions	EN 61000-3-2	Class A
Voltage Fluctuations and Flicker	EN 61000-3-3	Compliance

## GRN-60 SINGLE MECHANICAL SPECIFICATIONS

### OPEN FRAME

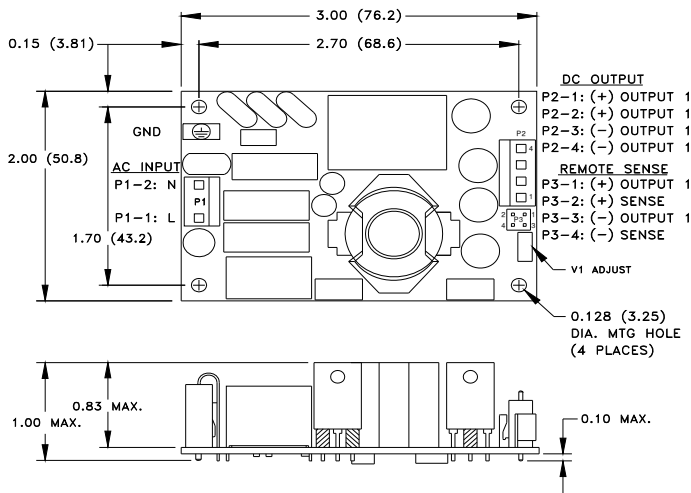

### OPTIONAL CHASSIS/COVER

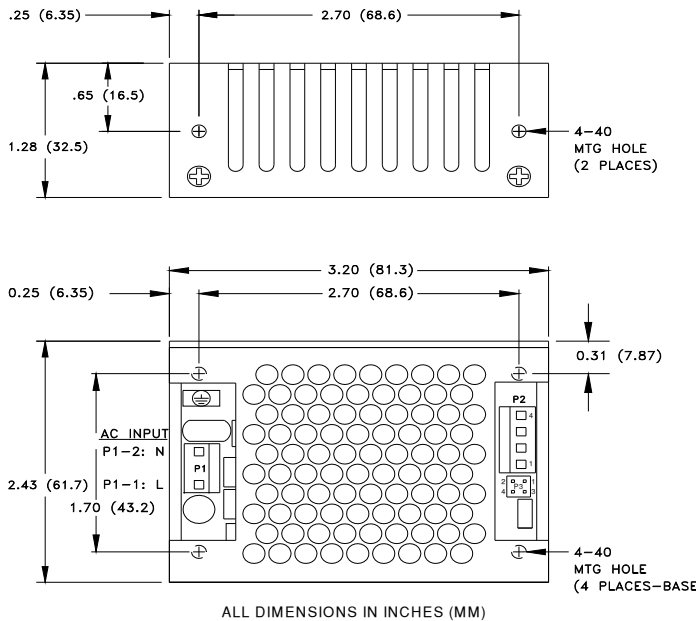


## CONNECTOR SPECIFICATIONS

<p><b>P1</b></p> <p>NEUTRAL LINE</p>	<p>AC Input</p> <p>.156 friction lock header mates with Tyco 640250-3 or equivalent crimp terminal housing with Tyco 3-640706-1 or equivalent crimp terminal.</p>
<p><b>P2</b></p> <p>4 (-) OUTPUT 3 (-) OUTPUT 2 (+) OUTPUT 1 (+) OUTPUT</p>	<p>DC Output</p> <p>.156 friction lock header mates with Tyco 770849-4 or equivalent crimp terminal housing with Tyco 3-640707-1 or equivalent crimp terminal.</p>
<p><b>P3</b></p> <p>(+) OUTPUT 2 (-) OUTPUT 4</p> <p>1 (+) OUTPUT 3 (-) OUTPUT</p>	<p>DC Output</p> <p>.100 breakaway header mates with Molex 22-55-2041 or equivalent crimp terminal housing with Molex 71851 or equivalent crimp terminal.</p>
	<p>Ground</p> <p>.187 quick disconnect terminal</p>


## APPLICATIONS INFORMATION

- Continuous output power must not exceed 60W.
- Sufficient area must be provided around power supply to allow natural movement of air to develop in convection cooled applications.
- Generally, adequate cooling is provided when semiconductor case temperatures do not exceed 70° C rise and transformer temperature does not exceed 60° C rise at any specified ambient temperature.
- This product is intended for use as a professionally installed component within information technology, industrial and medical equipment and is not intended for stand alone operation.
- Standard models include only one fuse in the input circuit. In consideration of clause 8.11.5 of IEC 60601-1-1:2005, a second fuse may be required in neutral conductor of the end product. Models with the suffix DF include a fuse in the line and neutral leads.
- Peak to peak output ripple and noise is measured directly at the output terminals of the power supply, without the use of the probe ground lead or retractable tip, 20 MHz bandwidth.
- This product was type tested and safety certified using the dielectric strength test voltages listed in Table 6 of IEC60601-1:2005. In consideration of clause 8.8.3, care must be taken to insure that the voltage applied to a reinforced insulation does not overstress different types and levels of insulation. Primary and secondary to ground capacitors may need to be disconnected prior to performing a dielectric strength type test on the power supply or the end product. It is highly recommended that the DC test voltage listed in DVB.1, annex DVB of UL60601-1 1<sup>ST</sup> Edition are not exceeded during a production-line dielectric strength test of the assembled end product. Please consult factory for further information.
- This power supply has been safety approved and final tested using a DC dielectric strength test. Please consult factory before performing an AC dielectric strength test.
- Maximum screw penetration into bottom chassis mounting holes is .100 inches.
- Maximum screw penetration into side chassis mounting holes is .188 inches.
- Common RF shielding precautions may need to be taken to assure emissions compliance. Refer to operating instructions for additional information.
- To comply with emissions specifications, all four mounting hole pads must be electrically connected to a common metal chassis. Chassis/cover option is recommended.

## TYPICAL EFFICIENCY VS. LOAD

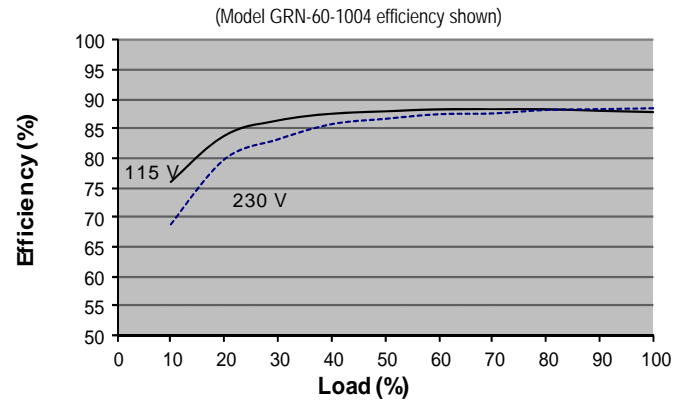

## MAX P<sub>OUT</sub> VS. AMBIENT TEMPERATURE/INPUT VOLTAGE

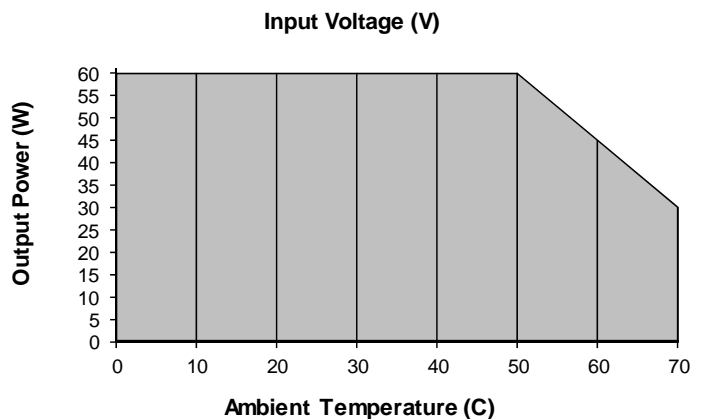

Derating requirements - Derate from 100% load at 50° C to 50% load at 70° C